JINTUO AUTO TECH

ONE-STOP

PROFESSIONAL AUTO EQUIPMENT & TOOLS SUPPLIER









YANTAI JINTUO AUTOMOBILE TECHNOLOGY CO.,LTD.

Add: Fuxin Industry Zone, Fushan District, Yantai City, Shandong Province, China, 264000

TEL:18863862288 FAX:0086-535-6383219

Web:www.cnframemachine.com E-mail:helenameng@cnframemachine.com

Model:J-100

Square Tube Steel Tilt Type



Standard Specification

Working Capacity	3,500kgs
Deck Height	520mm
Deck Length	5,600mm
Deck Width	2,200mm
Tower Pulling Force	98KN
Hydraulic Pressure	70Mpa
Net/Gross Weight	1,045kgs/1,050kgs
	870kgs/900kgs
Packing Size	5,600*2,250*120mm(1PCS)
	2,250*1,450*570mm(1PCS)

Model:J-300

Steel Plate Tilt Type

Standard Specification

Working Capacity	3,500kgs
Deck Height	520mm
Deck Length	5,600mm
Deck Width	2,200mm
Tower Pulling Force	98KN
Hydraulic Pressure	70Mpa
Net/Gross Weight	1,145kgs/1,150kgs
	870kgs/900kgs
Packing Size	5,600*2,250*120mm(1PCS)
	2,250*1,450*570mm(1PCS)



Model:T-900



Steel Plate Lift Type

Standard Specification

Working Capacity	3,500kgs
Deck Height	340-1,050mm
Deck Length	5,600mm
Deck Width	2,200mm
Tower Pulling Force	98KN
Hydraulic Pressure	70Mpa
Net/Gross Weight	1,995kgs/2,000kgs
	920kgs/950kgs
Packing Size	5,600*2,250*340mm(1PCS)
	2,250*1,450*570mm(1PCS)

Model:JT-18

Standard Specification

Working Capacity	3,000kgs
Deck Height	460mm
Deck Length	4,200mm
Deck Width	1,100mm
Tower Pulling Force	98KN
Hydraulic Pressure	70Mpa



Model:JT-19



Standard Specification

Working Capacity	3,000mm
Deck Height	170-1,700mm
Deck Length	3,350kgs
Deck Width	890mm
Tower Pulling Force	95KN
Hydraulic Pressure	70Mpa

Model:JT-30



Standard Specification

Deck Height	330mm
Deck Length	3,000mm
Deck Width	1,000mm
Tower Pulling Force	98KN
Hydraulic Pressure	70Mpa
Net/Gross Weight	415kgs/430kgs
Packing Size	3,000*900*350mm(1PCS)
	2,200*700*500mm(1PCS)

Model:JT-2011



Standard Specification

Deck Height	205mm
Deck Length	3,000mm
Deck Width	2,000mm
Tower Pulling Force	49KN
Hydraulic Pressure	70Mpa
Power Air Supply	0.6-0.8Mpa
Net/Gross	285kgs/305kgs
Packing Size	3,080*450*450mm(1PCS)

Model:J-2012



Standard Specification

Deck Height	205mm
Deck Length	2,100mm
Deck Width	1,900mm
Tower Pulling Force	49KN
Hydraulic Pressure	70Mpa
Power Air Supply	0.6-0.8Mpa
Net/Gross	320kgs/340kgs
Packing Size	2,250*700*490mm(1PCS)

Model:J-2013



Standard Specification

Deck Height	210mm
Deck Length	3,650mm
Deck Width	2,000mm
Tower Pulling Force	98KN
Hydraulic Pressure	70Mpa
Power Air Supply	0.6-0.8Mpa
Net/Gross	540kgs/560kgs
Packing Size	2,250*700*490mm(1PCS)

Model:JT-20



Standard Specification

Working Capacity	3,500kgs
Deck Height	260-1,600mm
Deck Length	4,160mm
Deck Width	900mm
Tower Pulling Force	98KN
Hydraulic Pressure	70Mpa

Model:JT-6800




Standard Specification

Tower Number	4-6pcs
Deck Height	600mm
Deck Length	6,600-12,000mm
Deck Width	2,580mm
G.W	10,000kgs
Hydraulic Pressure	70Mpa

Model:JT-G1

Frame Floor System

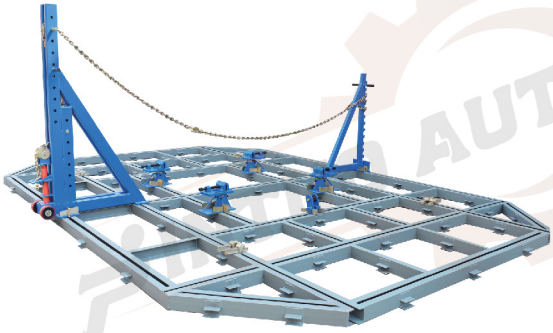

Standard Specification


Deck Length	6,000mm
Deck Width	4,000mm
Beam Lifting Capacity	2,000kgs
Tower Working Degree	360°
Air Supply Pressure	0.8Mpa
Max. Pulling Force	95KN

Anchor Floor System


Model:JT-G2

Standard Specification

Deck Length	7,000mm
Deck Width	4,000mm
Beam Lifting Capacity	2,000kgs
Tower Working Degree	360°
Air Supply Pressure	0.8Mpa
Max. Pulling Force	95KN

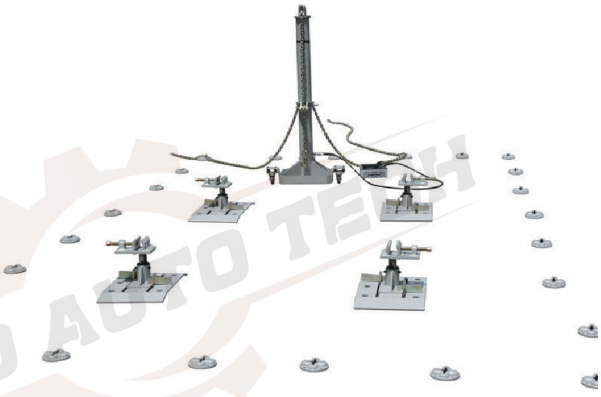

Model:J-11S

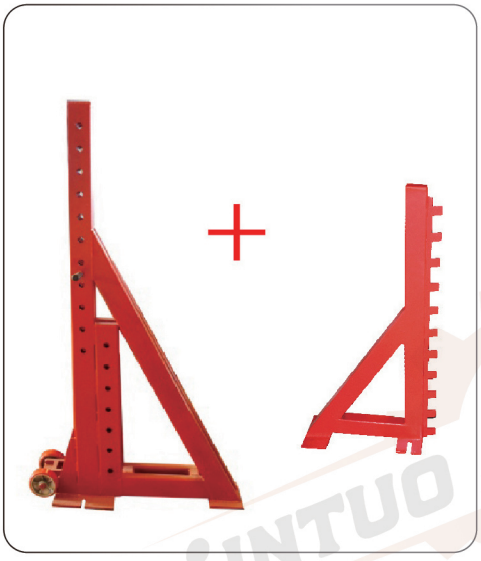

Model: J-11R





Model:JPB-560

Spray Booth



Standard Specification


External Dimensions	7,000*5,200*3,200mm
Internal Dimensions	6,900*3,900*2,450mm
Gate Size	3,000*2,400mm
Side Door Size	800*2,000mm
Boarding Board	1,600*600mm
Air Volume	12,000M³/H
Air Intake Fan	16,000M³/H
EPS Insulation Board	Thickness 50mm
Voltage Frequency	380V 50HZ

Spray Booth

Model:JPB-660

Standard Specification

External Dimensions	7,000*5,400*4,000mm
Internal Dimensions	6,900*3,900*2,650mm
Gate Size	3,000*2,600mm
Side Door Size	700*1,800mm
No Load Wind Speed	⩾0.3m/s
Baking Temperature	55℃
Painting Power	28KW
Baking Power	30KW
Voltage Frequency	380V 50HZ

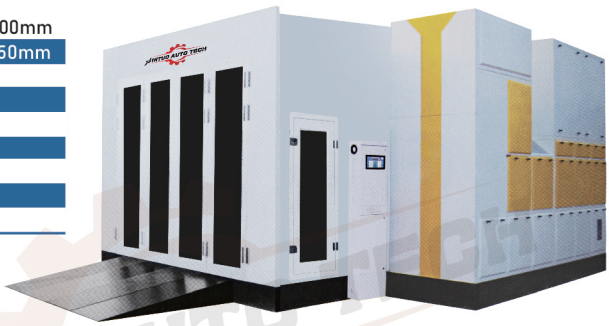

Model:JTL-4000CM

Clean Floor Two Post Lift



Standard Specification

Lifting Capacity	4,000kgs
Overall Width	3,340mm
Overall Height	3,700mm
Lifting Height	1,800mm
Width Inside Columns	2,800mm
Drive Thru Width	2,520mm
Voltage	110V/220V/380V
Net/Gross Weight	20/25kgs
	550kgs/570kgs
Packing Size	3,800*450*710mm(1PCS)
	850*260*240mm(1PCS)

Two Post Lift

Model:JTL-4000BM

Standard Specification

Lifting Capacity	4,000kgs
Overall Width	3,370mm
Overall Height	2,776mm
Lifting Height	1,850mm
Drive Thru Width	2,770mm
Motor Power	2.2KW
Voltage	110V/220V/380V
Net/Gross Weight	20kgs/25kgs
	530kgs/550kgs
Packing Size	2,800*530*720mm(1PCS)
	850*260*240mm(1PCS)



Model:JSLX-4000AU

Alignment Scissor Lift （in ground）



Standard Specification

Lifting Capacity	4,000kgs
Lenght of Platform	4,500mm
Width of Platform	600mm
Lifting Height	1,800mm
Min. Height	340mm
Secondary Jack	470mm
Lifting Time	50-60s
Motor Power	2.2KW
Voltage	110V/220V/380V
Net Weight	1,700kgs
Packing Size	4,600*650*400mm(2PCS)
	550*450*1,050mm(1PCS)

Ultra-Thin Scissor Lift

Model:JSLX-4000AA

Standard Specification

Lifting Capacity	4,000kgs
Lenght of Platform	4,500mm
Width of Platform	600mm
Lifting Height	1,800mm
Min. Height	340mm
Lifting Time	50-60s
Motor Power	2.2KW
Voltage	110/220/380V
Net Weight	1,900kgs
Packing Size	4,600*650*400mm(2PCS)
	550*450*1,050MM(1PCS)



Model:JSLX-4000SA



Ultra-Thin Scissor Lift

Standard Specification

Lifting Capacity	4,000kgs
Lenght of Platform	4,500mm
Width of Platform	600mm
Lifting Height	1,800mm
Min. Height	220mm
Secondary Jack	470mm
Lifting Time	50-60s
Motor Power	2.2KW
Voltage	110V/220V/380V
Net Weight	2,100kgs
Packing Size	4,600*750*300mm(2PCS)
	550*450*1,050mm(1PCS)

Ultra-Thin Scissor Lift

Model:JSLX-4000SD

Standard Specification

Lifting Capacity	4,000kgs
Lenght of Platform	4,500mm
Width of Platform	600mm
Lifting Height	1,800mm
Min. Height	220mm
Secondary Jack	470mm
Lifting Time	50-60s
Motor Power	2.2KW
Voltage	110V/220V/380V
Net Weight	2,150kgs
Packing Size	4,600*750*300mm(2PCS)
	550*450*1,050mm(1PCS)



Model:JT-3500S



Scissor Lift（under ground）

Standard Specification

Lifting Capacity	3,500kgs
Lenght of Platform	1,560-1,760mm
Width of Platform	550mm
Lifting Height	1,800mm
Min. Height	340mm
Lifting Time	50-60s
Operating Air Pressure	0.6-0.8Mpa
Motor Power	2.2KW
Voltage	110V/220V/380V
Net/Gross Weight	750kgs/770kgs
Packing Size	1,600*600*1,080mm(1PCS)

Low Profile Scissor Lift

Standard Specification

Lifting Capacity	3,000kgs
Lenght of Platform	1,550-2,070mm
Width of Platform	645mm
Lifting Height	1,800mm
Floor Height	110mm
Lifting Time	50-60s
Operating Air Pressure	0.6-0.8Mpa
Motor Power	2.2KW
Voltage	110V/220V/380V
Net/Gross Weight	860kgs/880kgs
Packing Size	1,600*650*200mm(2PCS)
	500*450*1,050mm(1PCS)

Model:JSL-3000A



Model:JT-3000P



Mid-Rise Scissor Lift

Standard Specification

Lifting Capacity	3,000kgs
Lenght of Platform	1,400mm
Width of Platform	520mm
Lifting Height	1,000mm
Min. Height	110mm
Width Between Platform	800mm
Lifting Time	30-50s
Operating Air Pressure	0.6-0.8Mpa
Motor Power	2.2KW
Voltage	110V/220V/380V
Net/Gross Weight	550kgs/570kgs
Packing Size	1,500*1,920*230mm(1PCS)
	500*450*1,050mm(1PCS)

Movable Low Position Scissor Lift

Standard Specification

Lifting Capacity	2,800kgs
Lifting Height	1,200mm
Min. Height	110mm
Lifting Time	30-50s
Motor Power	2.2KW
Voltage	110V/220V/380V
Net Weight	400kgs
Packing Size	2,300*1,100*280mm(1PCS)
	1,090*450*500mm(1PCS)

Model:JSL-2700P



Model:JFL-4000A



Four Post Lift

Standard Specification

Lifting Capacity	4,000kgs
Length of Platform	4,500mm
Width of Platform	600mm
Lifting Height	1,500mm
Secondary Jack	470mm
Lifting Time	50-60s
Motor Power	2.2KW
Voltage	110V/220V/380V
Net/Gross Weight	20kgs/25kgs
	1,180kgs/1,200kgs
Packing Size	4,600*650*850mm(1PCS)
	850*260*240mm(1PCS)

Tyre Changer

JT-600



Inside Clamp	12-24"
Outside Clamp	10-22"
Max.Wheel Diameter	1,050mm
Wheel Width	4-13"
Voltage	110V/220V/380V
Net/Gross Weight	200kgs/240kgs
Packing Dimension	1,150*920*930mm

Tyre Changer

JT-602



Motor Power	1.1/0.75KW
Outside Clamp	4-20"
Max.Wheel Diameter	980mm
Wheel Width	4-13"
Voltage	110V/220V/380V
Net/Gross Weight	130kgs/160kgs
Packing Dimension	1,000*850*900mm

Tyre Changer

JT-603



Inside Clamp	10-20"
Outside Clamp	10-20"
Max.Wheel Diameter	980mm
Wheel Width	10-20"
Voltage	110V/220V/380V
Net/Gross Weight	180kgs/200kgs
Packing Dimension	1,000*850*900mm

Tyre Changer

JT-606



Inside Clamp	12-24"
Outside Clamp	12-22"
Max.Wheel Diameter	1,050mm
Wheel Width	4-13"
Voltage	110V/220V/380V
Net/Gross Weight	200kgs/245kgs
Packing Dimension	1,200*900*1,000mm

Tyre Changer

JT-609



Inside Clamp	12-24"
Outside Clamp	10-22"
Max.Wheel Diameter	1,050mm
Wheel Width	4-13"
Voltage	110V/220V/380V
Net/Gross Weight	340kgs/420kgs
Packing Dimension	1,100*950*950mm(1PCS)
	1,340*1,030*300mm(1PCS)

Tyre Changer

JT-808



External Clamping	14-26"
Max. Wheel Weight	500kgs
Max. Wheel Diameter	1,600
Max. Tyre Width	780mm
Voltage	110V/220V/380V
Net/Gross Weight	517kgs/633kgs
Max.Torque	6457N.m
Packing Dimension	2,030*1,580*1,000mm

Wheel Balancer

JW-99



Rim Diameter	12-24"
Max.Wheel Diameter	980mm
Max.Wheel Width	4-15"
Net/Gross Weight	118kgs/146kgs
Power Supply	110V/220V
Packing	1,150*700*1,150mm

Wheel Balancer

JW-100



Rim Diameter	12-24"
Max.Wheel Diameter	980mm
Max.Wheel Width	4-15"
Net/Gross Weight	125kgs/151kgs
Power Supply	110V/220V
Packing	1,100*800*1,100mm

Wheel Balancer

JW-109



Rim Diameter	12-24"
Max.Wheel Diameter	980mm
Max.Wheel Width	4-15"
Net/Gross Weight	145kgs/171kgs
Power Supply	110V/220V
Packing	1,120*800*1,200mm

Wheel Balancer

JW-518



Rim Diameter	12-24"
Max.Wheel Diameter	650mm
Max.Wheel Width	1.5-12"
Net/Gross Weight	118kgs/146kgs
Power Supply	110V/220V
Packing	1,050*700*1,150mm

Truck Wheel Balancer

JW-1200



Rim Diameter	10-20"
Max.Wheel Diameter	1,200mm
Max.Wheel Width	12-26"
Net/Gross Weight	280kgs/300kgs
Power Supply	220V/380V
Packing	1,250*1,000*1,200mm

Truck Wheel Balancer

JW-C1200



Rim Diameter	13-24"
Inside Clamp	1,200mm
Outside Clamp	5.5-20"
Net/Gross Weight	250kgs/320kgs
Power Supply	220V/380V
Packing	1,260*960*1,130mm

Tyre Changer

JT-601



Inside Clamp	12-24"
Outside Clamp	10-22"
Max.Wheel Diameter	980mm
Wheel Width	12"
Voltage	110V/220V/380V
Net/Gross Weight	195kgs/225kgs
Packing Dimension	1,050*760*900mm

Tyre Changer

JT-801



Inside Clamp	12-24"
Outside Clamp	10-22"
Max.Wheel Diameter	980mm
Wheel Width	12"
Voltage	110V/220V/380V
Net/Gross Weight	305kgs/348kgs
Packing Dimension	1,110*820*980mm

Tyre Changer

JT-902S



Inside Clamp	14-26"
Outside Clamp	12-24"
Max.Wheel Diameter	1,100mm
Wheel Width	13"
Voltage	110V/220V/380V
Net/Gross Weight	341kgs/385kgs
Packing Dimension	1,320*1,100*1,910mm

Tyre Changer

JT-925



Inside Clamp	14-26"
Outside Clamp	12-24"
Max.Wheel Diameter	1,100mm
Wheel Width	13"
Voltage	110V/220V/380V
Net/Gross Weight	341kgs/385kgs
Packing Dimension	1,320*1,100*1,910mm

Tyre Changer


JT-807



Inside Clamp	19-26"
Outside Clamp	1,400mm
Max.Wheel Diameter	470mm
Wheel Width	380kgs
Voltage	110V/220V/380V
Net/Gross Weight	485kgs/560kgs
Packing Dimension	1,300*1,220*1,720mm

Tyre Changer

JT-809

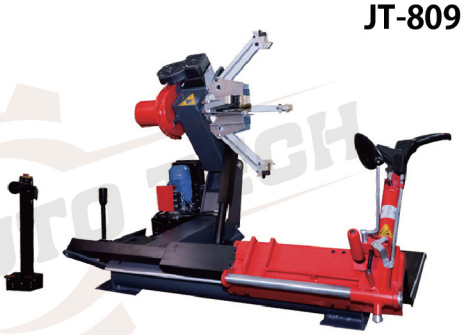

External Clamping	14-42"
Max. Wheel Weight	2,300mm
Max. Wheel Diameter	1,050mm
Max. Tyre Width	1,600kgs
Voltage	110V/220V/380V
Net/Gross Weight	758kgs/850kgs
Packing Dimension	2,130*1,850*1,050mm

Wheel Aligner
YL-66



Measurement Items	Measurement Accuracy	Measuring Range
Total Toe	±0.01°	±40°
Externa Bevel	±0.01°	±45°
Caster	±0.02°	±45°
S.A.I	±0.02°	±45°
Thrust Angle	±0.01°	±40°
Set Back	±0.01°	±40°
Max.Steering Angle	±0.02°	±50°
Wheel Track	±2MM°	1219MM-2438MM
Wheelbase	±2MM°	2006MM-4572MM

Details of Accessories

8 mega pixel industrial camera×2, 24 inch high definition display,
Corner plate transition block×2, Anti falling target×4,
Wedge block×2, Steering wheel holder,
Brake holder, Industrial engine,
Mouse and keyboard.

Wheel Aligner
YL-66A


Measurement Items	Measurement Accuracy	Measuring Range
Total Toe	±0.01°	±40°
Externa Bevel	±0.01°	±45°
Caster	±0.02°	±45°
S.A.I	±0.02°	±45°
Thrust Angle	±0.01°	±40°
Set Back	±0.01°	±40°
Max.Steering Angle	±0.02°	±50°
Wheel Track	±2MM°	1219MM-2438MM
Wheelbase	±2MM°	2006MM-4572MM

Details of Accessories

8 mega pixel industrial camera×2, 24+19inch high definition display,
Corner plate transition block×2, Anti falling target×4,
Wedge block×2, Steering wheel holder,
Brake holder, Industrial engine,
Mouse and keyboard.



Wheel Aligner
YL-76

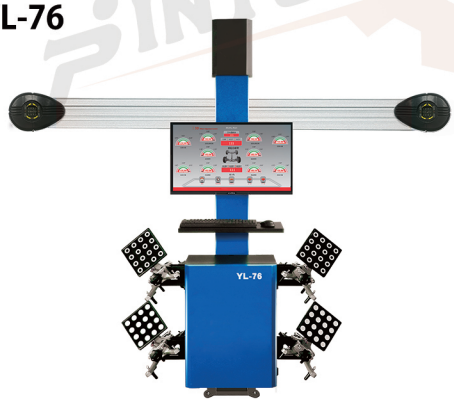

Measurement Items	Measurement Accuracy	Measuring Range
Total Toe	±0.01°	±40°
Externa Bevel	±0.01°	±45°
Caster	±0.02°	±45°
S.A.I	±0.02°	±45°
Thrust Angle	±0.01°	±40°
Set Back	±0.01°	±40°
Max.Steering Angle	±0.02°	±50°
Wheel Track	±2MM°	1219MM-2438MM
Wheelbase	±2MM°	2006MM-4572MM

Details of Accessories

8 mega pixel industrial camera×2, 32 inch high definition display,
Corner plate transition block×2, Anti falling target×4,
Wedge block×2, Steering wheel holder,
Brake holder, Industrial engine,
Mouse and keyboard.

Measurement Items	Measurement Accuracy	Measuring Range
Total Toe	±0.01°	±40°
Externa Bevel	±0.01°	±45°
Caster	±0.02°	±45°
S.A.I	±0.02°	±45°
Thrust Angle	±0.01°	±40°
Set Back	±0.01°	±40°
Max.Steering Angle	±0.02°	±50°
Wheel Track	±2MM°	1219MM-2438MM
Wheelbase	±2MM°	2006MM-4572MM

Details of Accessories

8 mega pixel industrial camera×2, 32+19 inch high definition display,
Corner plate transition block×2, Anti falling target×4,
Wedge block×2, Steering wheel holder,
Brake holder, Industrial engine,
Mouse and keyboard.

Wheel Aligner
YL-76A



Wheel Aligner
YL-86



Measurement Items	Measurement Accuracy	Measuring Range
Total Toe	±0.01°	–
Externa Bevel	±0.01°	±40°
Caster	±0.01°	±45°
S.A.I	±0.02°	±45°
Thrust Angle	±0.01°	±40°
Set Back	±0.01°	±40°
Max.Steering Angle	±0.02°	±50°
Wheel Track	±2MM°	1219MM-2438MM
Wheelbase	±2MM°	2006MM-4572MM

Details of Accessories


8 mega pixel industrial camera×2, 22+19 inch high definition display,
Corner plate transition block×2, Anti falling target×4,
Wedge block×2, Steering wheel holder,
Brake holder, Industrial engine,
Mouse and keyboard.

Wheel Aligner
YL-96

Measurement Items	Measurement Accuracy	Measuring Range
Total Toe	±0.01°	–
External Bevel	±0.01°	±40°
Caster	±0.01°	±45°
S.A.I	±0.02°	±45°
Thrust Angle	±0.01°	±40°
Set Back	±0.01°	±40°
Max.Steering Angle	±0.02°	±50°
Wheel Track	±2MM°	1219MM-2438MM
Wheelbase	±2MM°	2006MM-4572MM

Details of Accessories

8 mega pixel industrial camera×2, 22+19 inch high definition display,
Corner plate transition block×2, Anti falling target×4,
Wedge block×2, Steering wheel holder,
Brake holder, Industrial engine,
Mouse and keyboard.

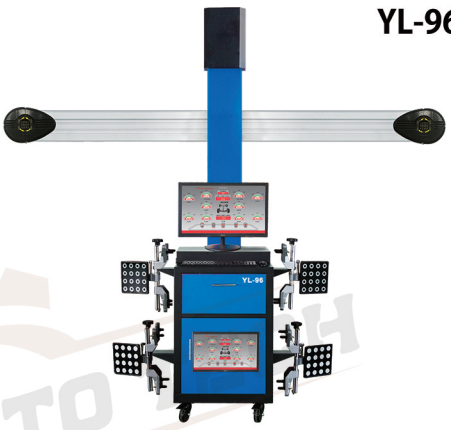

Wheel Aligner
YL-96A



Measurement Items	Measurement Accuracy	Measuring Range
Total Toe	±0.01°	±40°
External Bevel	±0.01°	±45°
Caster	±0.02°	±45°
S.A.I	±0.02°	±45°
Thrust Angle	±0.01°	±40°
Set Back	±0.01°	±40°
Max.Steering Angle	±0.02°	±50°
Wheel Track	±2MM°	1219MM-2438MM
Wheelbase	±2MM°	2006MM-4572MM

Details of Accessories

8 mega pixel industrial camera×2, 22+19 inch high definition display,
Corner plate transition block×2, Anti falling target×4,
Wedge block×2, Steering wheel holder,
Brake holder, Industrial engine,
Mouse and keyboard.

Enterprise Version Truck Wheel Aligner
YL-616



Measurement Items	Measurement Accuracy
Total Anterior Fasciculus	±10° ±2′
Single anterior Bundle	±5° ±1′
Camber Angle	±10° ±1′
Camber	±25° ±2′
Retraction Angle	±10° ±1′
Propulsion Angle	±10° ±1′
Maximum Steering Angle	±45° ±1′

High Configuration Truck Wheel Aligner
YL-816



Measurement Items	Measurement Accuracy
Total Toe	±10° ±2′
Toe	±5° ±1′
Camber	±10° ±1′
S.A.I	±25° ±2′
Set Back	±10° ±1′
Propulsion Angle	±10° ±1′
Max. Steering Angle	±45° ±1′

Cost-efficient Combo

YL-66+JFL-4000A



- Self-developed software, 95% of the car models on the market are compatible
- The machine can be upgraded for free with lifetime service
- Fast positioning, data reading can be completed within 3 seconds
- 3D digital imaging positioning technology, accuracy up to 0.01°

Best-selling Combination

YL-76A+JSLX-4000AU

- Large screen, high resolution, clear observation at any Angle
- Self-developed software, 95% of the models on the market are compatible
- The machine can be upgraded for free with lifetime service
- Fast positioning, data reading can be completed within 3 seconds
- 3D digital imaging positioning technology, accuracy up to 0.01°



High-end Combination

YL-86+JFL-4000A



- Large screen, high resolution, clear observation at any Angle
- Self-developed software, 95% of the models on the market are compatible
- The machine can be upgraded for free with lifetime service
- Fast positioning, data reading can be completed within 3 seconds
- 3D digital imaging positioning technology, accuracy up to 0.01°

Luxurious Combination

YL-96A+JSL-3000A

- Intelligent lift, suitable for any type lift
- Self-developed software, 95% of the models on the market are compatible
- The machine can be upgraded for free with lifetime service
- Fast positioning, data reading can be completed within 3 seconds
- 3D digital imaging positioning technology, accuracy up to 0.01°



Coin Spray Equipment


Mig Welder


Sheet Metal Repair Machine


Aluminum Car Body Welder


Aluminum Car Body Sheet Metal Repair Machin


Pneumatic Dust Free Dry Mill


7-Piece Sheet Metal Hammer Set


Sheet Metal Pry Bar Set (7PCS)


10T Separate Jack


Sheet Metal Broach


2D Measuring System


Three Dimensional Ruler


Electromagnetic Sag Repair Instrument


2T3M Hand Chain Hoist


Pneumatic Hydraulic Air Pump


Moving Bracket For Accident Vehicle


Go Jack


Electric Aluminum Nail Gun


3/8 Air Wrench


6Inch Heavy Duty Cutting Machine


Oil Water Separator


Reinforce The Cross - Paint Stand



Roller Cross Paint Stand



Multi-Function Spray Paint Stand


Spray Gun


Infrared Baking lamp

Lifting Equipment


3T Low Profile Dual Pump Floor Jack


3T Floor Jack


Vertical Spring Compressor


Transmission Jack



Shop Crane


Foldable Shop Crane


20T Shop Press


Lift Safety Bracket


3T Jack Stand


1.5M Engine Support

Tire Equipment


Nitrogen Machine


Brake Lathe


Pneumatic Tire Expander


Camber Corrector


Wall Type Automatic Air Inflator


Electronic Inflate Meter


Pneumatic Wrench


Truck Tyre Changer


Pneumatic Bead Breaker


Pneumatic Low Speed Cutting Mill

Air Equipment


Screw Air Compressor


Freeze Dryer


Air Tank


Precision Filter


Air Compressor Room Accessories


Oil-Free Air Compressor


Piston Air Compressor


Oil Water Filter


Slide Rail Exhaust System


20HP Screw air Compressor Maintenance Kit

Fuel-Efficient Equipment


Walnut Sand Carbon Deposit Cleaning Machine


Oil Drainer With Measuring Cup


Automatic Transmission Oil Changer


Deep Cleaning Of Brake System Replace The Instrument


Deep Cleaning Of Cooling System Exchange Instrument


A Complete Set Of Connectors For Oil Replacement Of Wave Tank


27Piece Cap Type Oil Box Wrench


Manual Grease Gun


PVC Flat Trolley


Creeper

Tool Equipment



Luxury Tools Cabinet


Engine Overhaul


368Pieces Of Comprehensive Maintenance Tool Car Set



Seven Layer Tools Car


Mobile Simple Tool Car


128Piece Kit


1/4"53Piece Kit


18 Piece Brake Sub Pump Adjustment Group


Valve Oil Seal Dismantling Assembly Sleeve


40Pieces Of Bit Set Tools

Beauty Equipment


Contactless Automatic Car Washing Machine


Gantry Type Contactless Automatic Car Washing Machine


Wall Mounted High Pressure Cleaning Machine


Mobile Automatic High Pressure Cleaning Machine


Steam Car Washing Machine


Internal And External Stainless Steel Dehydrator


Vacuum Cleaner


Shampoo Machine


Fully Automatic Central Dispenser


High Pressure Spiral Arms


Combination Of Drum


Automatic Tube Winder Drum


Automatic Pipe Winder Air Drum


OGW Double Barrel Drum


Splicing Grid

The Oil Curing


4L Full Synthetic Engine Oil Energizing SN


4L Full Synthetic Engine Oil Shaped Charge SN


1L Full Synthetic Engine Oil Energizing SN


1L Full Synthetic Engine Oil Shaped Charge SN


Special For Lift Hydraulic Oil 9L

YANTAI JINTUO AUTOMOBILE TECHNOLOGY CO.,LTD.

Add:Fuxin Industry Zone, Fushan District, YantaiCity, ShandongProvince,China,264000
TEL:18863862288 FAX:0086-535-6383219
Web:www.cnframemachine. com E-mail:helenameng@cnframemachine.com